



## Container bag discharge station

SS-TKD




Refer carefully to this manual before operation.


## ■ Application

The container bag discharge station is used for discharging and conveying of materials from the container bag in the plant; With simple operation, its bottom can mount the suction box for production line conveying or silo feeding; which also can install the optional rotary valve and acceleration chamber to feed the large silo.

## ■ Outline Drawings(SS-TK)

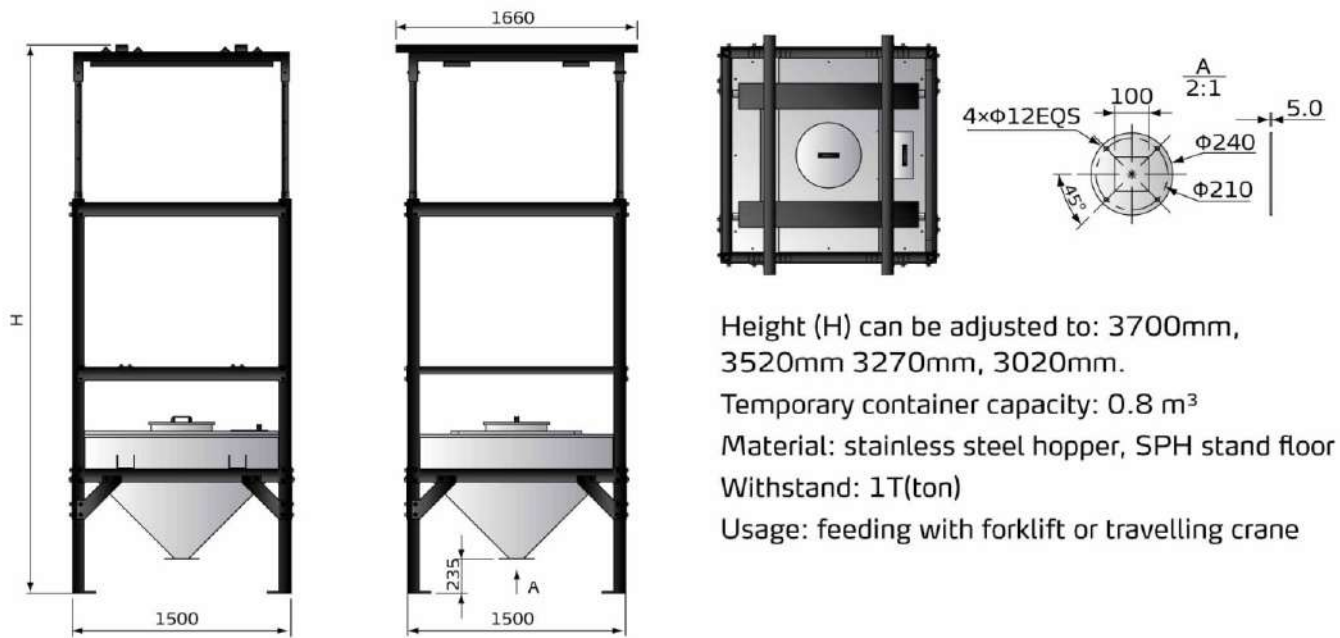

### 3D Diagram


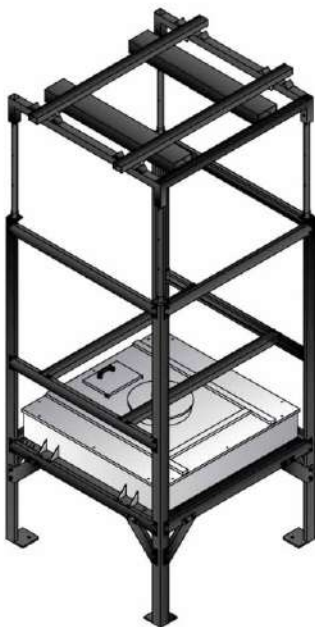


### Feeding with forklift



## ■ Outline Drawings(SS-TKD)

Optional with electrical hoist

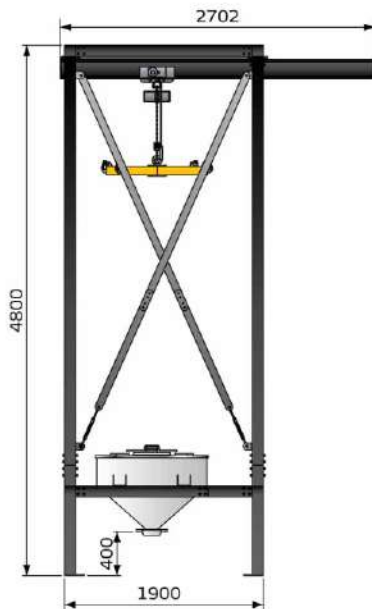

Electrical hoist: load 2T,

Spe.: 3 $\Phi$ /380V/50HZ

Range of use: total length of the container bag  $\leq 2350$ mm (with hoisting belt)

Temporary container capacity: 0.4 m<sup>3</sup>


Standard shut-off plate

Suction box is optional

## 3D Diagram



## Operations

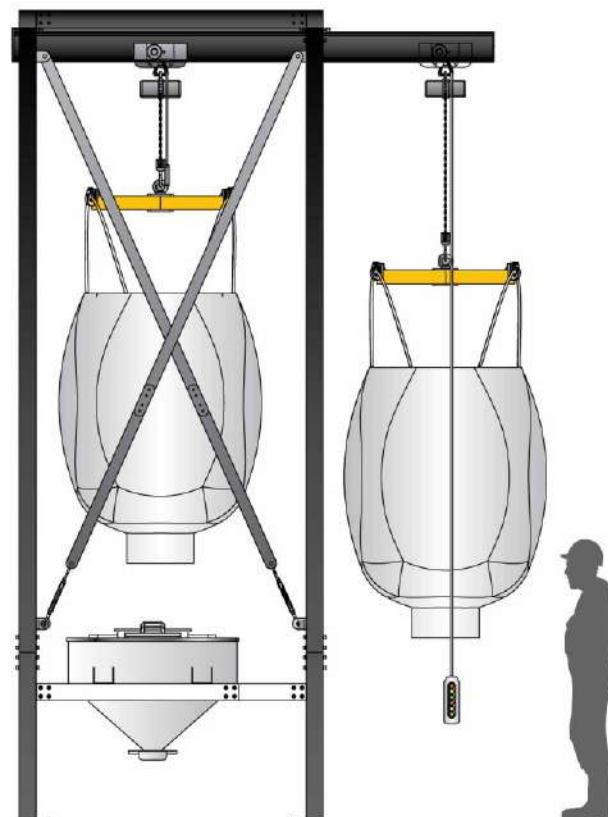

## Shini Group

Addr: No. 23, Minhe St., Shulin Dist.,  
New Taipei, Taiwan

Tel: +886 2 2680 9119

Fax: +886 2 2680 9229

Email: [shini@shini.com](mailto:shini@shini.com)

### Factories:

- Taiwan
- Dongguan
- Pinghu
- Ningbo
- Chongqing
- Pune

2017-11-15-04 Copyrights Reserved.

[www.shini.com](http://www.shini.com)